

## Graco LineLazer™ Dual Spray Kit 287626

311289B

EN


**- Use with Line Striping Materials -**



### Important Safety Instructions

Read all warnings and instructions in this manual.  
Save these instructions.

*3600 psi (24.8 MPa, 248 bar) Maximum Working Pressure*

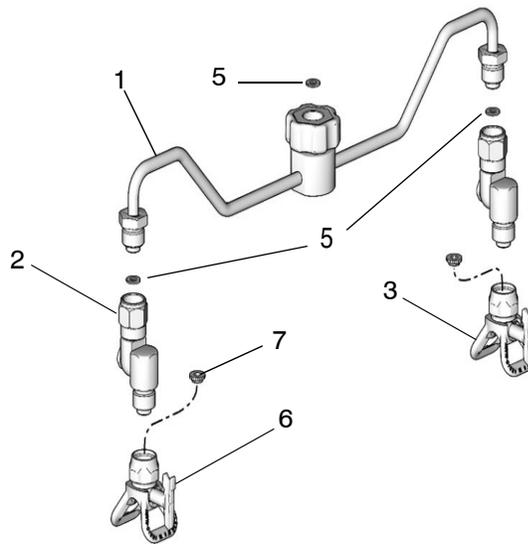

ti7137a

Ref	Part	Description	Qty
1	249865	ADAPTER, dual spray, accessory	1
2	235486	NOZZLE, spray, angle 180°	2
3	243161	GUARD, RAC 5	2
5	166969	GASKET, non-metallic	3
6	286725	TIP, spray, RAC-5	2
7	111025	GASKET*	2

\* Use yellow gasket 111025 (included in kit) when spraying harsh materials

PROVEN QUALITY. LEADING TECHNOLOGY.


**WARNING**
**SKIN INJECTION HAZARD**

High-pressure fluid from gun, hose leaks, or ruptured components will pierce skin. This may look like just a cut, but it is a serious injury that can result in amputation. **Get immediate surgical treatment.**


- Do not point gun at anyone or at any part of the body.
- Do not put your hand over the spray tip.
- Do not stop or deflect leaks with your hand, body, glove, or rag.
- Do not spray without tip guard and trigger guard installed.
- Engage trigger lock when not spraying.
- Follow **Pressure Relief Procedure** in this manual, when you stop spraying and before cleaning, checking, or servicing equipment.

**Pressure Relief Procedure**

- 1 Engage gun trigger safety.
- 2 Turn off power to pump.
- 3 Disengage gun trigger safety. Hold metal part of gun to side of grounded metal pail and trigger gun to relieve pressure.
- 4 Engage gun trigger safety.
- 5 Open pressure drain valve. Leave drain valve open until you are ready to spray again.

*If you suspect that the spray tip or hose is completely clogged, or that pressure has not been fully relieved after following the steps above, VERY SLOWLY loosen the tip guard retaining nut or hose end coupling to relieve the pressure gradually, then loosen completely. Now clear the tip or hose.*

## Installation

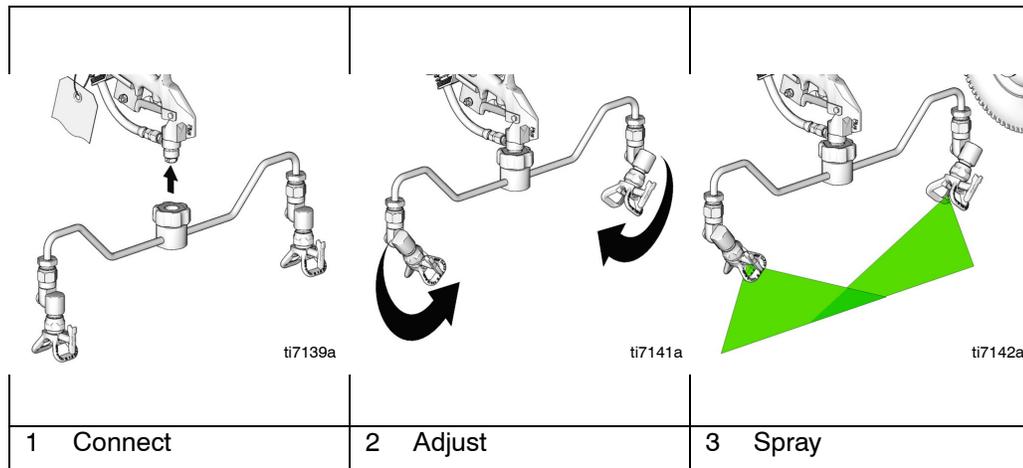

## Technical Data

Maximum working pressure	3600 psi (24,8 MPa, 248 bar)
Fluid inlet/outlet size	7/8-14 UNC
Wetted parts	Aluminum, Delrin <sup>®</sup> , PTFE, nylon, nickel-plated carbon steel, stainless steel
Delrin <sup>®</sup> is a trademark of the DuPont Co.	

*TO PLACE AN ORDER*, contact your Graco distributor, or call **1-800-690-2894** to identify the nearest distributor.

All written and visual data contained in this document reflects the latest product information available at the time of publication.  
Graco reserves the right to make changes at any time without notice.

*For patent information, see [www.graco.com/patents](http://www.graco.com/patents).*

This manual contains English. MM 311289

**Graco Headquarters:** Minneapolis

**International Offices:** Belgium, Korea, China, Japan

**GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441**

<http://www.graco.com>

9/2005 Revised October 2013